

## P-55 Turbomiser:

Polyethylene 600 liter tank, with graduated level indicator scale (50 liter). A 18 liter fresh water tank is built into the main tank for washing hands. Dual agitation hydraulic and pneumatic system. High pressure centrifugal fan. Polyethylene fan housing. Two electrovalves on/off with electrical remote control.



Il serbatoio in polietilene ad alta densità, il primo con integrato il serbatoio lavamani da lt. 18, grazie alla sua conformazione assicura l'utilizzo completo del contenuto e un'ottima omogeneizzazione della miscela.

The all-new high-density polyethylene tanks are the first tanks to incorporate a 18 liter fresh water tank for cleaning hands, molded into the main tank. The tank features ensure complete flushing of the contents and thorough chemical mixing.

La pompa centrifuga di nostra fabbricazione, costruita in materiale anticorrosivo, è esente da manutenzione e non necessita di Filtri sull'aspirazione. La cinghia 3V di trasmissione è dotata di tenditore automatico che ne evita lo slittamento.




CIMA's centrifugal pump is made of anti-corrosive material and does not require any maintenance or suction filter. The pump is driven by a 3V belt equipped with an automatic tensioner to prevent slipping.

La pressione sulla distribuzione è mantenuta costante dal regolatore. Il manometro, in bagno di glicerina, di grande dimensione è ben visibile dal posto di guida. Filtro sulla mandata di grande portata (l/min: 240).




The distribution system pressure is kept constant by the pressure regulator. The large glycerine filled gauge is easily visible from the tractor seat. Large capacity pressure filter (240 l/min).

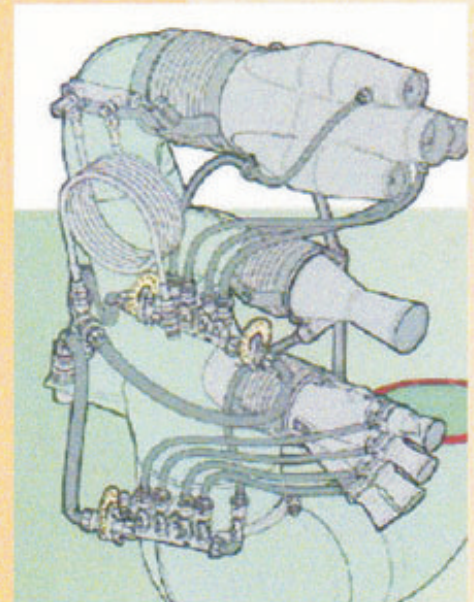

Il tenditore automatico mantiene costante la tensione della cinghia poly-v evitandone lo slittamento e quindi l'usura. La ruota libera, incorporata nella puleggia, in caso di arresto improvviso del motore permette al ventilatore di continuare a girare.

The automatic tensioner of the driving poly-V belt keeps belt tension constant, avoiding slipping and wear. The overrunning clutch, incorporated into the lower pulley, allows the fan to run free if the tractor power take-off is suddenly stopped.

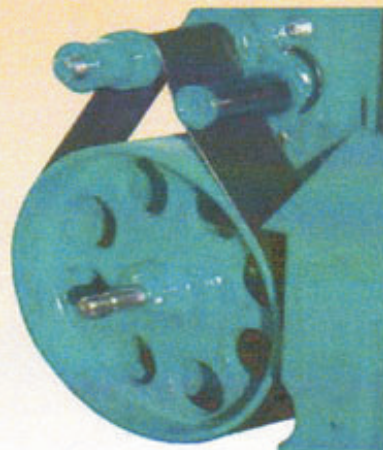

Unique air shear nozzle does not wear. Nozzles are equipped with check valves.



Made in Italy